



Pre-release Information

HF/VHF/UHF TRANSCEIVER

IC-9100

430-470MHz
144MHz
HF/50MHz
Satellite
D-STAR
GPS



THE ALL-ROUND TRANSCEIVER

MULTI-BAND, MULTI-MODE ALL IN ONE RADIO

The IC-9100 contains years of advanced Icom technology in a compact, all-in-one HF/VHF/UHF transceiver. This radio covers most ham bands and modes, and provides a wide variety of operating styles. Whether you're working DX QSO, RTTY, D-STAR DV, satellite, or even moonbounce, Icom's years of technological experience is working right along with you. The IC-9100H's double conversion super-heterodyne system with an image rejection mixer reduces intermodulation distortion. Icom's IF DSP technologies offer a host of digital features to guard against QRM and QRN, no matter which band you choose to explore.



HF/VHF/UHF TRANSCEIVER

IC-9100



Multi-band, dual independent receiver

The IC-9100 covers 100W on HF, 50MHz and 144MHz, 75W on 430/440MHz bands and 10W on the 1200MHz band.*1 The radio simultaneously receives two different bands (1. HF/50MHz + VHF/UHF, 2. VHF + UHF, 3. 430/440MHz + 1200MHz) and works as if there are two independent receivers in one radio. For example, you can arrange a 7MHz schedule QSO using a D-STAR repeater on VHF/UHF band, while watching 7MHz band activity using the simple band scope.



▲Simple band scope screen

*1 Optional UX-9100 1200MHz band unit required.




32-bit DSP & double conversion superheterodyne

Much like the technology in Icom's high-end HF radios, Icom has used a double conversion superheterodyne system and an image rejection mixer in the IC-9100's HF to 430/440MHz bands. Each main and sub-receiver has a dedicated DSP unit providing flexible digital IF filters, AGC time constant, twin PBT, manual and auto notch filter, noise reduction, noise blanker, etc.



Optional 1st IF filters for HF/50MHz bands

The IC-9100 comes with a built-in 15kHz 1st IF (roofing) filter and can accept up to two optional filters (3kHz FL-431 and 6kHz FL-430) in front of the 1st IF amplifier stage. The 3kHz filter is especially effective in CW and SSB modes to eliminate overloading caused by strong signals just outside the passband.



▲Optional FL-430 and FL-431



Optional D-STAR DV mode (Digital Smart Technology for Amateur Radio)

A world first HF digital voice communications for amateur radio! Work D-STAR DV mode in the IC-9100 by adding the optional UT-121 D-STAR module. The DV mode is available in 28MHz and 50MHz bands simplex mode as well as in VHF and UHF bands. 28MHz or 50MHz DX operation using DV mode will give you a new fun. In addition, the D-STAR repeater (DR) mode operation makes it easy to access D-STAR repeaters.



▲Optional UT-121



USB connector for PC control

Modulator, received audio, RTTY demodulator, DV mode data can be transferred over the USB cable. By using appropriate 3rd party software, you can control as well as operate many of the digital modes via the single USB connection. Using the CI-V data format, the IC-9100 can be controlled by a PC through a USB or CT-17 level converter.



CI-V remote control jack (left) and USB connector on the rear panel ▲



GPS position reporting functions

The IC-9100 has a GPS button on the front panel. Your position data is shown on the display and can be sent to other stations in DV mode*2. When a calling station transmitting GPS data via DV mode is received, the IC-9100 displays the distance and direction to the station. GPS A mode is supported.



▲Direction and distance to RX station

*2 Optional UT-121 D-STAR unit required. External GPS receiver can be connected via data 1 connector. Also, position data can be entered manually.



Satellite mode operation

The satellite mode synchronizes the uplink (transmitting) and downlink (receiving) frequencies and shifts the frequencies in the same tuning step. 20 alphanumeric satellite memory channels store frequencies, operating mode and tone settings for quick setting.



▲Satellite mode screen



Optional CS-9100 programming software

When used with the optional CS-9100 programming software, alphanumeric memory channels, callsigns, filter widths and AGC settings can be easily made from a PC via USB cable connection. Share your memory channels info and radio settings.



RTTY demodulator and decoder

The built-in RTTY demodulator and decoder allow you to read an RTTY message on the air instantly. No external units or PC required.



Optional 1200MHz band unit

By installing the optional UX-9100 1200MHz band unit, the IC-9100 extends the coverage to the 1200MHz band. You can also enjoy L/V or L/U mode satellite operation.



▲Optional UX-9100

And more....

- Built-in automatic antenna tuner for HF and 50MHz bands
- Band edge beep function
- Built-in voice synthesizer announces operating frequency, mode and S-meter level
- Electronic keyer jack on the front panel
- 4 channel CW mode memory keyer
- VSC (Voice Squelch Control) function
- Multi function meter shows signal strength, output power, SWR, ALC and compression level
- Main and sub-receiver external speaker connectors

SPECIFICATIONS

GENERAL

- Frequency coverage*1 : (Unit:MHz)

Receive	0.030- 60.000*2	136.000- 174.000*2
	420.000-480.000*2	1240.000-1320.000*3
Transmit	1.800- 1.999	3.500- 3.999
	5.3305, 5.3465, 5.3665, 5.3715, 5.4035*4	
	7.000- 7.300	10.100- 10.150
	14.000- 14.350	18.068- 18.168
	21.000- 21.450	24.890- 24.990
	28.000- 29.700	50.000- 54.000
	144.000-148.000	430.000-450.000
	1240.000-1300.000*3	
- *1 Showing USA version. Varies according to version.
- *2 Some frequency bands are not guaranteed.
- *3 With UX-9100. *4 USB only
- Mode : USB, LSB, CW, RTTY, FM, AM*5, DV (with UT-121)
 - (*5 Transmit : HF/50MHz only, Cannot receive on 1200MHz band)
- Number of memory : 297 Ch (99 Ch for each HF/50 channels MHz, 144MHz, 430/440 MHz band)
 - 3 call Ch (1 Ch for each band)
 - 18 scan edges (6 Ch for each band)
 - 20 satellite memories and
 - 26 GPS memories
- Power supply requirement : 13.8V DC \pm 15%
- Operating temp. range : 0°C to +50°C; +32°F to +122°F

- Antenna connector :

HF/50MHz	SO-239 (50 Ω) x2
144MHz	SO-239 (50 Ω)
430/440MHz	Type-N (50 Ω)
- Frequency stability : Less than \pm 0.5ppm (0°C to +50°C)
- Current drain :

Transmit	Max. power 24A
Receive	Max. audio 5.5A
- Dimensions (WxHxD) : 315x116x343 mm; (projections not included) 12¹/₃₂x4⁹/₁₆x13¹/₂ in
- Weight (approx.) : 11kg; 24.3lb

TRANSMITTER

- Output power :

	HF/50MHz	144MHz	430/440MHz
SSB/CW/RTTY/FM/DV	2-100W	2-100W	2-75W
AM	2-25W	-	-
- Spurious emissions :

1.8- 29.995MHz	Less than -50dB
50MHz/144MHz	Less than -63dB
430/440MHz	Less than -61.8dB
- Carrier suppression : More than 40dB
- Unwanted sideband : More than 55dB suppression

RECEIVER

- Intermediate frequencies :

HF/50MHz	64.455MHz, 36kHz
144MHz	10.850MHz, 36kHz
430/440MHz	71.250MHz, 36kHz
 - Sensitivity :

	0.5-1.8MHz*1	1.8-29.9MHz*1	50-54MHz*2	144/440MHz
SSB/CW	-	0.20 μ V	0.16 μ V	0.11 μ V
AM	15.8 μ V	2.5 μ V	2.0 μ V	1.4 μ V
FM	-	0.63 μ V (28-29.7)	0.40 μ V	0.18 μ V
DV	-	1.26 μ V (28-29.7)	0.79 μ V	0.35 μ V
- SSB/CW, AM : 10dB S/N, FM : 12dB SINAD, DV : 1% BER
 *1 Preamp1 ON. *2 Preamp2 ON.
- Selectivity :


SSB (BW=2.4kHz)	2.4kHz/-6dB	3.8kHz/-60dB
CW (BW=500Hz)	500Hz/-6dB	900Hz/-60dB
RTTY (BW=350Hz)	350Hz/-6dB	650Hz/-60dB
AM (BW=6kHz)	6.0kHz/-6dB	15kHz/-60dB
FM (BW=15kHz)	12.0kHz/-6dB	20kHz/-60dB
DV (12.5kHz spacing)	More than -50dB	
 - Spurious and image rejection ratio:

HF/50MHz	More than 70dB
144/440MHz	More than 60dB
 - Audio output : More than 2.0W (8 Ω load, 10% dist.)
 - UX-9100 1200MHz BAND UNIT
 - AG-25 144MHz WEATHERPROOF PREAMPLIFIER
 - AG-35 430/440MHz WEATHERPROOF PREAMPLIFIER
 - UT-121 D-STAR DIGITAL UNIT
 - FL-430 6kHz 1st IF FILTER (for HF/50MHz)
 - FL-431 3kHz 1st IF FILTER (for HF/50MHz)

OPTIONS

- HM-36 HAND MICROPHONE
- SM-50 DESKTOP MICROPHONE
- SP-21 EXTERNAL SPEAKER
- SP-23 EXTERNAL SPEAKER
- PS-126 DC POWER SUPPLY (13.8V/25A)
- OPC-1457 DC POWER CABLE
- AH-4 HF+50MHz AUTOMATIC ANTENNA TUNER
- AH-2b ANTENNA ELEMENT for use with AH-4
- MB-123 CARRYING HANDLE
- CT-17 CI-V LEVEL CONVERTER
- IC-PW1/EURO HF+50 MHz 1 kW LINEAR AMPLIFIER
- CS-9100 CLONING SOFTWARE
- OPC-1529R DATA COMMUNICATION CABLE

REAR VIEW

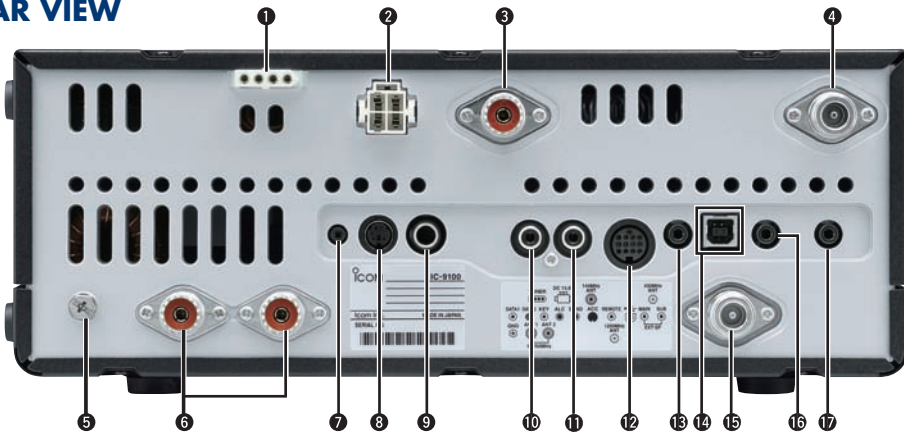

- ① Tuner Socket
- ② DC Power Socket
- ③ 144MHz Antenna Connector
- ④ 430/440MHz Antenna Connector
- ⑤ Ground Terminal
- ⑥ HF/50MHz Antenna Connectors
- ⑦ Data1 Jack
- ⑧ Data2 Jack
- ⑨ Key Jack
- ⑩ ALC Input Jack
- ⑪ Send Control Jack
- ⑫ ACC Socket
- ⑬ CI-V Remote Control Jack
- ⑭ USB Connector
- ⑮ 1200MHz Antenna Connector (With optional UX-9100)
- ⑯ External Speaker Jack (Main)
- ⑰ External Speaker Jack (Sub-band)

This device has not been approved by the appropriate authorities in each country. This device may not be sold or leased, or be offered for sale or lease, until approval has been obtained. All stated features, appearances, screen shots, options and specifications may be subject to change without notice. Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in the United States, the United Kingdom, Germany, France, Spain, Russia, Japan and/or other countries.

Icom Inc. 1-1-32, Kami-minami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013 www.icom.co.jp/world

Count on us!

Icom America Inc.

2380 116th Avenue NE,
Bellevue, WA 98004, U.S.A.
Phone: +1 (425) 454-8155
Fax: +1 (425) 454-1509
E-mail: sales@icomamerica.com
URL: http://www.icomamerica.com

Icom New Zealand

146A Harris Road, East Tamaki,
Auckland, New Zealand
Phone: +64 (09) 274 4062
Fax: +64 (09) 274 4708
E-mail: inquiries@icom.co.nz
URL: http://www.icom.co.nz

Icom (UK) Ltd.

Blacksale House, Altira Park,
Herne Bay, Kent, CT6 6GZ, U.K.
Phone: +44 (0)1227 741741
Fax: +44 (0)1227 741742
E-mail: info@icomuk.co.uk
URL: http://www.icomuk.co.uk

Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road,
Taipei, Taiwan, R.O.C.
Phone: +886 (02) 2559 1899
Fax: +886 (02) 2559 1874
E-mail: sales@asia-icom.com
URL: http://www.asia-icom.com

Your local distributor/dealer:

Icom Canada

Glenwood Centre #150-6165 Highway 17,
Delta, B.C., V4K 5B8, Canada
Phone: +1 (604) 952-4266
Fax: +1 (604) 952-0090
E-mail: info@icomcanada.com
URL: http://www.icomcanada.com

Icom (Europe) GmbH

Communication Equipment
Auf der Krautweide 24
65812 Bad Soden am Taunus, Germany
Phone: +49 (6196) 76685-0
Fax: +49 (6196) 76685-50
E-mail: info@icom-europe.com
URL: http://www.icomeurope.com

Icom France s.a.s.

Zac de la Plaine,
1 Rue Brindejoc des Moulinais, BP 45804,
31505 Toulouse Cedex 5, France
Phone: +33 (5) 61 36 03 03
Fax: +33 (5) 61 36 03 00
E-mail: icom@icom-france.com
URL: http://www.icom-france.com

Beijing Icom Ltd.

10C07, Long Silver Mansion, No.88, Yong Ding
Road, Haidian District, Beijing, 100039, China
Phone: +86 (010) 5889 5391/5392/5393
Fax: +86 (010) 5889 5395
E-mail: bjicom@bjicom.com
URL: http://www.bjicom.com

Icom (Australia) Pty. Ltd.

Unit 1 / 103 Garden Road,
Clayton, VIC 3168 Australia
Phone: +61 (03) 9549 7500
Fax: +61 (03) 9549 7505
E-mail: sales@icom.net.au
URL: http://www.icom.net.au

Icom Spain S.L.

Ctra. Rubi, No. 88 "Edificio Can Castanyer"
Bajos A 08174, Sant Cugat del Valles,
Barcelona, Spain
Phone: +34 (93) 590 26 70
Fax: +34 (93) 589 04 46
E-mail: icom@icomspain.com
URL: http://www.icomspain.com

Icom Polska

81-850 Sopot, ul. 3 Maja 54, Poland
Phone: +48 (58) 550 7135
Fax: +48 (58) 551 0484
E-mail: icompolska@icompolska.com.pl
URL: http://www.icompolska.com.pl