


ICOM

IC-R75



Icom Inc.

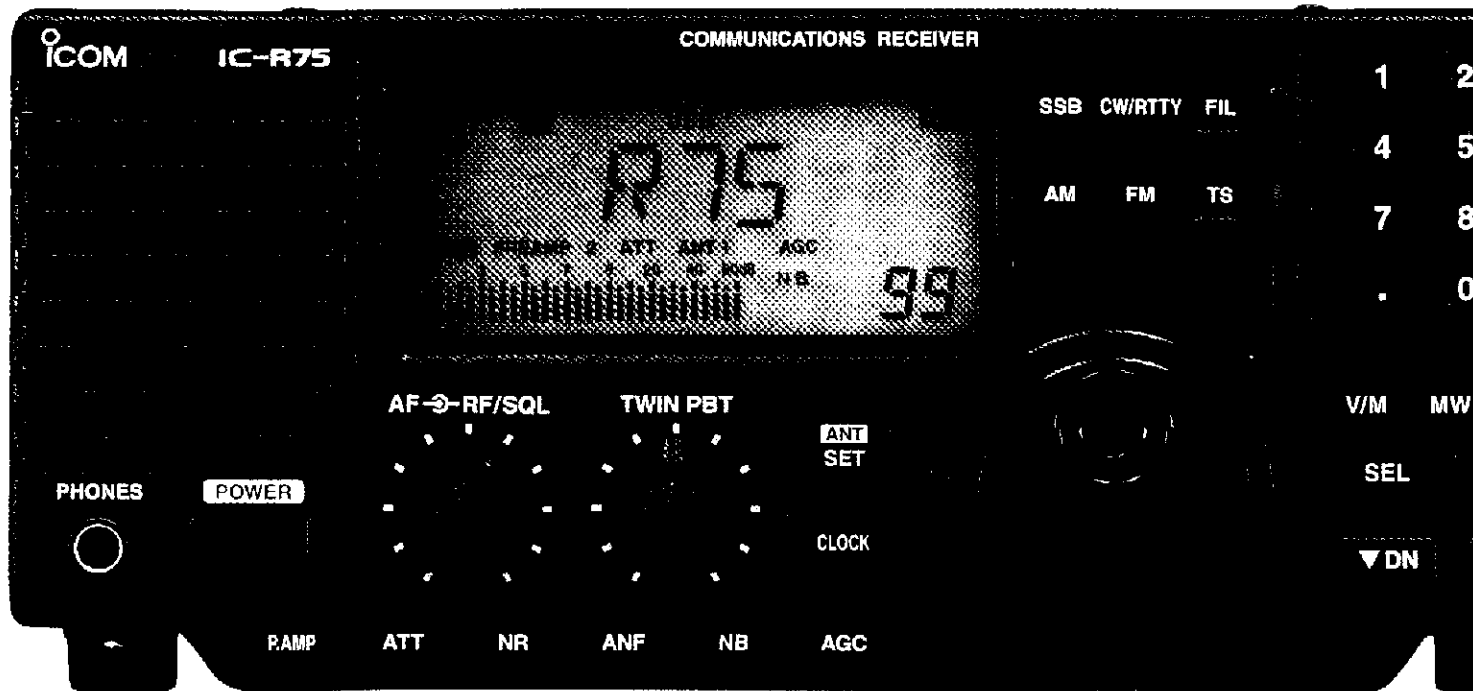

WIDE FREQUENCY COVERAGE AND

Expanded frequency coverage


The IC-R75 covers a frequency range that's wider than other HF receivers; 0.03-60.000000 MHz*. This wide frequency coverage allows you to listen to a variety of communications including marine communications, amateur radio, short wave radio broadcasts and more.

*Guaranteed 0.1-29.99 MHz and 50-54 MHz only

High stability receiver circuit

Icom's latest wide band technology provides highly stable receive sensitivity over the entire receive frequency range. The IC-R75 makes it easy to catch communications world wide.

• Receive sensitivity characteristics example

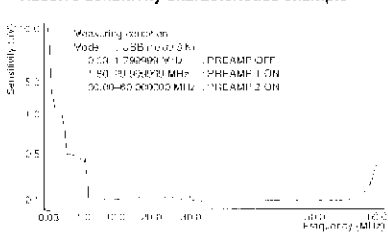


Superior dynamic range

A wide dynamic range of more than 100 dB^{*1}, 104.5 dB^{*2} for 14 MHz band, 102.5 dB^{*2} for 50 MHz band, and a well-designed triple conversion system help min-

imize image and spurious responses for better signal fidelity.

- *1 Not guaranteed.
- *2 Not guaranteed; When PREAMP OFF, CW narrow 500 Hz bandwidth; 100 kHz channel spacing


• Dynamic range characteristics example

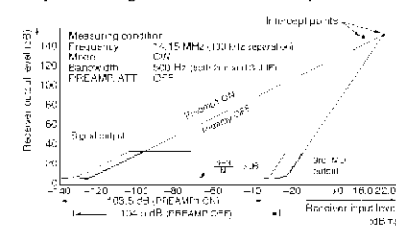

Synchronous AM detection


Synchronous AM detection (or S-AM) prevents audio distortion while receiving AM broadcasts, etc. This provides high quality AM receive as an additional mode.

• Difference between AM and S-AM detection

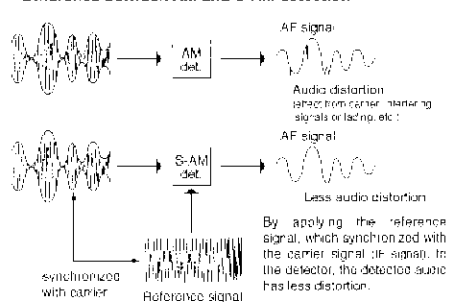

Twin PBT capability

The PBT (passband tuning) function narrows and moves the IF passband at two stages to efficiently eliminate interfering signals.

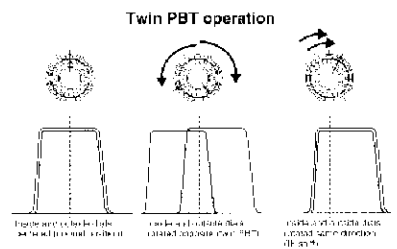


DSP capabilities

DSP (Digital Signal Processor) filtering in the AF stage is available with the optional UT-106 DSP UNIT. The DSP provides the following functions:

Noise reduction:

Pulls desired AF signals from noise. Outstanding S/N ratio is achieved, providing clean audio in SSB, AM and FM. Pull weak signals right out of the noise.

Comparison of receive signal speaker output

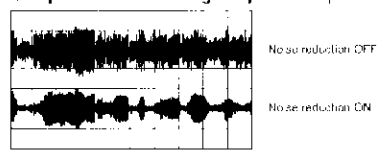

The IC-R75 covers a wide frequency range from 0.03 to 60 MHz allowing you to listen in to a world of information. With innovative features such as twin passband tuning, synchronous AM detection, DSP capabilities, remote PC control and more—shortwave listening is easier than ever. All this comes in a compact, lightweight package that can be conveniently used in your ham shack, den or vehicle.

HF+50 MHz ALL MODE COMMUNICATIONS RECEIVER

IC-R75

INNOVATIVE FEATURES...

Alphanumeric readout

The function display has an alphanumeric readout that indicates up to 8-character memory names for easy recognition.

Selectable RF gain/squelch control

The RF gain and/or squelch control can be set to the [SQL] control in *set mode* to match your operating preference.

Other outstanding features...

- Compact body
- Digital bar S-meter
- Front mounted speaker for easy listening
- Internal clock with ON/OFF, sleep timer
- Numeric keypad for direct frequency or memory channel input
- Attenuator
- 2-level preamp
- Selectable AGC (FAST/SLOW/OFF)
- Noise blanker
- 99 memories plus 2 program scan edges
- Ample scanning functions available and more...

Automatic Notch filter:

This automatically minimizes beat signals and protects the receive signal. Also, the notch frequency is automatically adjusted to follow interfering beat signals—reducing interference from RTTY signals during SSB operation for example.

FM mode standard

Unlike many other HF/50 MHz receivers there is no need to install an additional unit for FM mode reception on the 29 and 50 MHz bands.




Flexible filter selection

Up to two optional filters* can be installed, providing flexible band width selection and filter combinations.

*One each for 9 MHz and 455 kHz IF stage.


	1st IF 9 MHz stage	2nd IF 455 kHz stage
SSB	FL-103 (2.8 kHz)	FL-96 (2.8 kHz)
	FL-223 (1.9 kHz)	FL-222 (1.8 kHz)
		FL-257 (3.3 kHz)
CW/RTTY	FL-100 (500 Hz)	FL-52A (500 Hz)
	FL-101 (250 Hz)	FL-53A (250 Hz)
	FL-232 (350 Hz)	

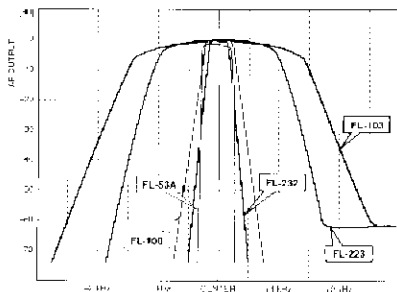


Optional PC remote control—RS-R75




FRONT PANEL—gives you access to all switches and controls on the front panel of the IC-R75.



BAND SCOPE—shows signal conditions around a specified frequency.



SCAN MANAGER—used to graphically display scans in progress and to control scan functions.



SETTINGS—allows you to adjust settings in 3 categories: General, Sound and Display, to suit your operating preferences.

All available functions can be controlled and simple memory editing from a PC running the optional RS-R75 REMOTE CONTROL SOFTWARE. In addition, this software provides a simple bandscope function. Icom's current CI-V capability will allow you to control the IC-R75 with other programs.

Control command for user made program

```

01: 15.000.000
02: 15.000.000
03: 15.000.000
04: 15.000.000
05: 15.000.000
06: 15.000.000
07: 15.000.000
08: 15.000.000
09: 15.000.000
10: 15.000.000
11: 15.000.000
12: 15.000.000
13: 15.000.000
14: 15.000.000
15: 15.000.000
16: 15.000.000
17: 15.000.000
18: 15.000.000
19: 15.000.000
20: 15.000.000
21: 15.000.000
22: 15.000.000
23: 15.000.000
24: 15.000.000
25: 15.000.000
26: 15.000.000
27: 15.000.000
28: 15.000.000
29: 15.000.000
30: 15.000.000
31: 15.000.000
32: 15.000.000
33: 15.000.000
34: 15.000.000
35: 15.000.000
36: 15.000.000
37: 15.000.000
38: 15.000.000
39: 15.000.000
40: 15.000.000
41: 15.000.000
42: 15.000.000
43: 15.000.000
44: 15.000.000
45: 15.000.000
46: 15.000.000
47: 15.000.000
48: 15.000.000
49: 15.000.000
50: 15.000.000
51: 15.000.000
52: 15.000.000
53: 15.000.000
54: 15.000.000
55: 15.000.000
56: 15.000.000
57: 15.000.000
58: 15.000.000
59: 15.000.000
60: 15.000.000
61: 15.000.000
62: 15.000.000
63: 15.000.000
64: 15.000.000
65: 15.000.000
66: 15.000.000
67: 15.000.000
68: 15.000.000
69: 15.000.000
70: 15.000.000
71: 15.000.000
72: 15.000.000
73: 15.000.000
74: 15.000.000
75: 15.000.000
76: 15.000.000
77: 15.000.000
78: 15.000.000
79: 15.000.000
80: 15.000.000
81: 15.000.000
82: 15.000.000
83: 15.000.000
84: 15.000.000
85: 15.000.000
86: 15.000.000
87: 15.000.000
88: 15.000.000
89: 15.000.000
90: 15.000.000
91: 15.000.000
92: 15.000.000
93: 15.000.000
94: 15.000.000
95: 15.000.000
96: 15.000.000
97: 15.000.000
98: 15.000.000
99: 15.000.000

```

SPECIFICATIONS

GENERAL

- Frequency coverage : 0.03-60.000000 MHz*
*0.03-29.999999 MHz only for Asia version; specifications guaranteed 0.1-29.99 MHz and 50-54 MHz only
- Mode : USB, LSB, CW, RTTY, AM, S-AM, FM
- Number of memory channels : 101 (99 regular, 2 scan edges)
- Frequency stability : Less than ± 7 ppm from 1 min. to 60 min. after power on. After that rate of stability less than ± 1 ppm/hr. at +25°C (-77°F). Temperature fluctuations 0°C to +50°C (+32°F to +122°F) less than ± 5 ppm.
- Power supply requirement : 13.8 V DC $\pm 15\%$ (negative ground)
- Current drain (at 13.8 V DC) : Standby 0.9 A
Max. audio 1.1 A
- Antenna connector : SO-239 (50 Ω), push connection terminal (500 Ω)
- Dimensions : 241(W) x 94(H) x 229(D) mm
(projections not included) 9 1/2(W) x 3 1/8(H) x 9 1/2(D) in
- Weight (approx.) : 3.0 kg; 6 lb 10 oz
- REMOTE connector : RS-232C D-sub 9-pin
- CI-V connector : 2-conductor 3.5 (d) mm (1/8")

RECEIVER

- Receive system : Triple-conversion superheterodyne system
- Intermediate frequencies :

Mode	1st (MHz)	2nd (MHz)	3rd (kHz)
USB*/LSB*	69.0115	9.0115	455
CW*	69.0106	9.0106	455.9
RTTY*	69.0105	9.0105	456
AM*/S-AM	69.0100	9.0100	450
FM	69.0115	9.0115	450

*May differ according to selected IF filter.

• Sensitivity

Frequency range	SSB/CW/RTTY 10 dB S/N	AM/S-AM 10 dB S/N	FM 12 dB SINAD
0.1-1.8 MHz**	2.0 μ V	5.6 μ V	—
1.8-28 MHz**	0.16 μ V	1.6 μ V	—
28-29.99 MHz**	0.16 μ V	1.6 μ V	0.22 μ V
50-54 MHz**	0.13 μ V	1.0 μ V	0.2 μ V

**Preamp: OFF; *Preamp 1: ON; **Preamp 2: ON


- SQL sensitivity (threshold) : SSB, CW, RTTY : Less than 5.6 μ V **
FM : Less than 0.32 μ V **
**Preamp 1: ON; **Preamp 2: ON
- Selectivity : SSB, CW, RTTY : More than 2.1 kHz/-6 dB
Less than 4.0 kHz/-60 dB
AM, S-AM : More than 6 kHz/-6 dB
Less than 20 kHz/-50 dB
FM : More than 12 kHz/-6 dB
Less than 30 kHz/-40 dB
- Spurious and image rejection ratio: More than 70 dB (except IF through:50 MHz band)
- Audio output power : More than 2.0 W at 10% distortion with an 8 Ω load (at 13.8 V DC)
- PHONES connector : 3-conductor 6.35 (d) mm (1/4")
- External SP connector : 2-conductor 3.5 (d) mm (1/8")/8 Ω

Supplied accessories:

- AC adapter or DC power cable (depending on version)
- Spare fuse

All stated specifications are typical and subject to change without notice or obligations.


OPTIONS




CR-282 HIGH STABILITY CRYSTAL UNIT
Contains a temperature-compensating oven heater and crystal unit for improved frequency stability. Frequency stability: ± 0.5 ppm



UT-102 VOICE SYNTHESIZER
Announces the operating mode, frequency, signal strength level and the time.



UT-106 DSP UNIT
Provides AF DSP functions such as noise reduction and auto notch.



CT-17 CI-V LEVEL CONVERTER
For remote receiver control using a PC equipped with an RS-232C port.

RS-R75 REMOTE CONTROL SOFTWARE

Supplied items:

- Application CD-ROM
- RS-232C serial interface cable

Allows you to control the receiver from your PC (for Microsoft® Windows® 95 or Windows® 98). Microsoft and Windows are registered trademarks of Microsoft Corporation.



9 MHz filters

- FL-100 CW/RTTY narrow:** 500 Hz/-6 dB
- FL-101 CW narrow:** 250 Hz/-6 dB
- FL-103 SSB wide:** 2.8 kHz/-6 dB
- FL-223 SSB narrow:** 1.8 kHz/-6 dB
- FL-232 CW/RTTY narrow:** 350 Hz/-6 dB



455 kHz filters

- FL-52A CW/RTTY narrow:** 500 Hz/-6 dB
- FL-53A CW narrow:** 250 Hz/-6 dB
- FL-96 SSB wide:** 2.8 kHz/-6 dB
- FL-222 SSB narrow:** 1.8 kHz/-6 dB
- FL-257 SSB wide:** 3.3 kHz/-6 dB

IC-MB5 MOBILE BRACKET
Communications receiver bracket for mobile operation.

MB-23 CARRYING HANDLE
For easy portable operation.

AD-55/A/V AC DAPTER
Allows you to power the receiver via domestic AC.

Icom Inc. 6-9-16, Kamihigashi, Hirano-ku, Osaka 547-0002, Japan Phone: 06 6793 5302 Fax: 06 6793 0013

Count on us!

Icom America Inc.
<Corporate Headquarters>
2380 116th Avenue N.E., Bellevue, WA 98004, U.S.A.
Phone: (425) 454-8155 Fax: (425) 454-1509
URL : http://www.icomamerica.com
<Customer Service>
Phone: (425) 454-7619

Icom Canada
A Division of Icom America Inc.
3071 4th Road, Unit 9, Richmond, B.C., V6X 2T4, Canada
Phone: (604) 273-7400 Fax: (604) 273-1900

Icom (Australia) Pty. Ltd.
A.C.N. 006 092 575
290 294 Albert Street, Brunswick, Victoria, 3056, Australia
Phone: 03 9387 0666 Fax: 03 9387 0022
URL : http://www.icom.auct.com

Asia Icom Inc.
6F No. 68, Sec. 1 Cheng Teh Road, Taipei, Taiwan, R.O.C.
Phone: (02) 2559 1899 Fax: (02) 2559 1874

Icom (Europe) GmbH
Communication Equipment
Himmelgeister Str. 100, D-40225 Dusseldorf, Germany
Phone: 0211 346047 Fax: 0211 333639
URL : http://www.icomeurope.com

Icom Spain S.L.
Ctra. de Gracia a Marrisa Km. 14.750
08190 Sant Cugat del Valles Barcelona, SPAIN
Phone: (93) 590 26 70 Fax: (93) 589 04 46
URL : http://www.icomspain.com

Icom (UK) Ltd.
Unit 9, Sea St., Harme Bay, Kent, CT6 8LD, U.K.
Phone: 01227 741741 Fax: 01227 741742
URL : http://www.icomuk.co.uk

Icom France Sa
Zac de la Plaine, Rue Brindejonc des Moulins
BP 5804, 31505 Toulouse Cedex, France
Phone: 561 36 03 03 Fax: 561 36 03 00
URL : http://www.icom-france.com



Icom Inc. (Japan), is an ISO9001 certification acquired company.

RADIC33 F50LS
Your local distributor dealer: 241
8 AV. DORBELES D.P. 241
33698 MERIGNAC CEDEX
TEL 05 56 97 35 34
FAX 05 56 55 03 66
99NS0029 © 1999 Icom Inc. Printed in Japan
"EB" RADIC33.IFRANCE.COM