

SUPER GAINER

144/430MHz帯高利得2バンドモバイルアンテナ

SG7200

(意匠登録出願済)

レピーター対応型

全方向回転ホイップ機構付(実用新案登録第1412570号)

300MHz帯受信対応

DIAMOND
ANTENNA

取扱説明書

このたびはスーパーゲイナーをお買い求めいただきまして誠にありがとうございました。ご使用前に、この取扱説明書をよくお読みのうえ正しくお使いください。お読みになったあとは、大切に保存してください。

●特長

- 1 スーパーゲイナーは、自動車のフラッシュサーフェイス化にマッチするよう曲線を強調した新しいデザイン感覚のモバイルアンテナです。
- 2 144/430MHz共に、アースを必要としないノンラジアルタイプのアンテナですので、取り付け場所を選びません。トランクリッド、ルーフサイドなど、どこへ取り付けてもVSWRの変化が少なくなっています。
- 3 144/430MHz共に、高利得が得られるC-Loadタイプです。
- 4 デュープレクサーを併用することにより、同時に2バンドの送受信または一つの周波数で受信しながら、他のバンドでの送信が可能です。
- 5 接栓のセンターピンには24K金メッキを施してありますので、極めてロスの少ない構造になっています。
- 6 全方向回転ホイップ機構(実用新案登録第1412570号)付ですので、車庫入れ時のめんどろなアンテナの取り外しが不要です。回転ホイップ部を引き上げれば360度どの方向へも倒すことができます。
- 7 300MHz帯の各種業務用バンドが受信できます。

●アンテナの周波数調整方法

スーパーゲイナーは無調整タイプのモバイルアンテナです。周波数調整の必要がある場合は回転ホイップ部におけるエレメントの上下スライドで行います。調整後はセットビスをしっかり締め付けてください。

●ご注意

- 1 SG7200はアレスター方式を採用しているため、下部エレメントとアース部分(マッチングセクション外筒)の導通があります。また、接栓のセンターピンと下部エレメントの導通はありません。
- 2 セットビスは、走行中に多少ゆるむ場合がありますので、特に新しいアンテナについては締め付けを十分に行ってください。
- 3 SG7200の回転ホイップは全方向性のため、走行中は倒さずに走行してください。
- 4 回転ホイップを使用するときは、指などを挟まないようご注意ください。

●送信空中線の型式


アマチュア局の免許申請書類の空中線型式には「単一型」とお書きください。




PASSION-RADIO.FR

Analogique - Numérique - SDR

●VSWR表

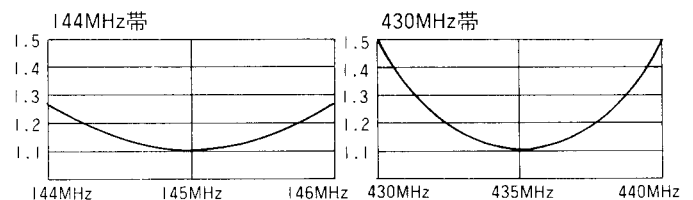

●パーツ名称(番号)

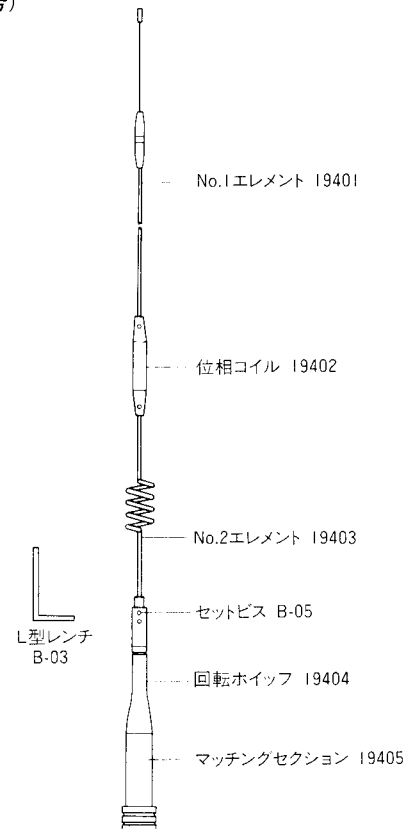

●規格

- 利得 / 3.2dB (144MHz)、5.7dB (430MHz)
- 耐入力 / 150W(合計)
- インピーダンス / 50Ω
- VSWR / 1.5以下
- 全長 / 0.96m
- 重量 / 335g
- 接栓 / M形
- 形式 / 1/2λ C-Loadノンラジアル(144MHz)、5/8λ2段C-Loadノンラジアル(430MHz)、300MHz帯受信対応

■お買い上げいただきました製品は、厳重な品質管理のもとに生産されておりますが、万一運搬中の事故などによる破損がありましたら、取扱店にお申し付けください。

■本アンテナの仕様および外観は、改良のため予告なく変更することがありますのでご了承ください。



PASSION-RADIO.FR

Analogique - Numérique - SDR

SUPER GAINER

2m/70cm DUAL BAND HIGH PERFORMANCE MOBILE WHIP ANTENNA.
OMNIDIRECTIONALLY TILTABLE WHIP STRUCTURE.
CAPABLE OF RECEIVING 300MHZ BAND.
REPEATER FREQUENCY COMPATIBLE.

SG7200

OPERATING INSTRUCTIONS

Description

1. THE SUPRE GAINER series antennas employ our new design concept for the mobile whip antenna which emphasizes to go along well with recent aerodynamic car design.
2. Since the antenna employs radialless structure on both 2m and 70cm bands, it works well at virtually any place on your car body. It can be located on trunk lid, roof, gutter or any place without effecting vswr characteristics.
3. High performance C-Load structure is used on both 2m and 70cm bands.
4. Both bands can be transmitted or received simultaneously, or one band can be transmitted while receiving another band or vice versa simultaneously by using a duplexer.
5. 24K gold plated center conductor is used in connector section of the antenna.
6. Omnidirectionally tilttable whip structure enables the antenna to be tilted for any direction by pulling the whip element section lightly. And it eliminates troublesome antenna detachment when your car is parked in the garage.

Adjustment.

THE SUPER GAINER series antennas are all factory adjusted and do not require any adjustment. If center frequency of the antenna has to be altered, loosen two set screws at the top of tilttable whip section and put the element in and out to have best vswr at desired center frequency. Be sure to fasten the screws after the adjustment.

Note

1. The SG7200 employs DC ground structure, whip element and ground section (outer shell of the impedance matching section) are short-circuited, and center conductor of the feedpoint connector and whip element are isolated.
2. Since those set screws being used throughout the antenna may be loosened due to the vibration during driving, they have to be refastened from time to time after several drives especially the antenna is right off from the package.
3. Do not drive the car with the antenna tilted, since whip element moves freely when the antenna is tilted.
4. Be careful not to be bit your finger into the tilttable whip section when the antenna is being erected.

Specifications

| | |
|-------------------|--|
| Gain | 3.2dB(2m) 5.7dB(70cm) |
| Max. power rating | 150W(sum of both bands) |
| Impedance | 50ohms |
| VSWR | Less than 1.5:1 |
| Length | 0.96m(37.8") |
| Weight | 335g(0.74lbs.) |
| Connector | UHF male |
| Type | 1/2 wave C-Load radialless mobile whip(2m) 5/8 wave two element C-Load radialless mobile whip(70cm) 300MHz commercial communication band |

Part name (number)

| | |
|-------|---|
| 19401 | No. 1 element |
| 19402 | Phase inductor |
| 19403 | No. 2 element |
| B-05 | Set screw |
| B-03 | Hexagonal wrench |
| 19404 | Omnidirectionally tilttable whip structure section |
| 19405 | Impedance matching section |



PASSION-RADIO.FR

Analogique - Numérique - SDR