



DUAL BAND FM TRANSCEIVER

# IC-2725E

## Twice the versatility, twice the fun!

### V/V, U/U simultaneous receive capability

The IC-2725E is a unique dual band mobile, providing VHF/VHF, UHF/UHF simultaneous receive capability along with VHF/UHF full duplex operation. Simple touch of a button allows you to change the main (transmit) band and sub band.

### Independent controls for each band

Operating two bands simultaneously is very simple with Icom's symmetric layout with a wide LCD display showing both band settings in an easy to read side by side format. The IC-2725E provides separate tuning, volume, squelch knobs and function buttons for the left and right side bands. Also, listen to both bands independently through separate left and right band audio jacks.

### Dynamic Memory Scan (DMS)

With 212 memory channels, Icom's exclusive Dynamic Memory Scan system gives you flexibility over your scanning lists, fully customizable in 10 banks.



Photo shows combined controller/main unit setup using optional MB-85.

Selectable Green and Amber Display.

### Compact, remote control head

The control head with the 3.5m (11.5') separation cable is an easy to install two pieces configuration. This configuration offers the flexibility of mounting the head while placing the main unit in an out-of-the-way location without any additional cost. Microphone jacks are mounted both on the control head and main unit of the radio!

### HM-133, remote control microphone

The backlit HM-133, gives you control of your IC-2725E in the palm of your hand. The Icom exclusive "Hot keys" (F1/F2) memorize the transceiver full settings. As if switching between two separate radios, VHF/UHF operating frequencies, tone settings as well as the display color and set mode settings are memorized.



HM-133

### CTCSS and DTCS

The IC-2725E incorporates 50 CTCSS and 104 DTCS operation along with the tone scan function. Don't miss out on communications because of not having the proper type of "tones"! The "pocket beep" feature gives you an audible and visible indicator of an incoming call.

### And more...

- Optional MB-85 allows mounting the controller on the main unit
- 9600bps packet data terminal (mini-DIN 6-pin connector)
- 10dB RF attenuator
- Selectable squelch delay
- 12 DTMF memory channels (24 digits)
- Sub band auto mute function
- Wide/narrow channel spacing
- Newly adopted MOS-FET power amplifier

Icom Inc.

## SPECIFICATIONS

### GENERAL

- Frequency coverage : (Unit: MHz)  
 EURO version 144-146, 430-440  
 ITR Version 144-146, 430-434, 435-438
- Mode : FM
- Number of memory channels : 212 (Including 2 call and 10 scan edges)
- Antenna impedance : 50Ω (SO-239)
- Power supply requirement : 13.8V DC ±15%
- Usable temperature range : -10°C to +60°C
- Frequency stability : ±10ppm (-10°C to +60°C)
- Tuning step increments : 5, 10, 12.5, 15, 20, 25, 30 and 50kHz
- Current drain (at 13.8V DC) :  
 Transmit VHF 12A  
 UHF 11A  
 Receive stand-by 1.2A  
 max. audio 1.8A
- Dimensions (projections not included; W×H×D) :  
 Controller 140 × 50 × 27mm  
 Main Unit 140 × 40 × 187mm
- Weight (approx.) :  
 Controller 150g  
 Main Unit 1.4kg

### TRANSMITTER

- Output power : VHF 50W, 20W, 5W selectable  
 UHF 35W, 20W, 5W selectable
- Max. frequency deviation : ±5.0kHz
- Spurious emissions : Less than -60dB
- Microphone impedance : 600Ω (8-pin modular jack)

### RECEIVER

- Receive system : Double conversion superheterodyne
- Intermediate frequencies : 1st 38.85/46.05MHz  
 (Left/right side band) 2nd 450/455kHz
- Sensitivity (at 12dB SINAD) : Less than 0.18μV
- Squelch sensitivity : Less than 0.13μV (at threshold)
- Selectivity : More than 12kHz/-6dB  
 Less than 30kHz/-60dB
- Spurious rejection ratio : More than 60dB
- Audio output (at 13.8V DC) : More than 2.4W at 10% distortion with an 8Ω load
- Ext. speaker connector : 2-conductor 3.5 (d) mm/8Ω

#### Supplied accessories: (\*depending on version)


- Hand microphone, HM-133
- Mounting bracket, MB-84\*
- DC power cable, OPC-1132
- Separation cable, OPC-1155\*
- Spare fuse

All stated specifications are subject to change without notice or obligation.

## OPTIONS

### ■ MOUNTING BRACKETS

- **MB-84** CONTROLLER BRACKET  
 Mounts the remote controller in a convenient location for operation with the front panel detached.
- **MB-85** COMBINATION BRACKET  
 Mounts the remote controller to the main unit. 20cm (7.87in.) separation cable is supplied
- **MB-65** MOUNTING BASE  
 Mounts the remote controller with the MB-84. Adjustable angle and direction for optimum positioning.
- **MB-17A** MOBILE MOUNTING BRACKET  
 The main unit is easily attached and removed.

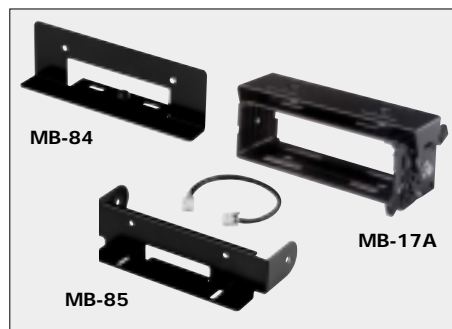

### ■ MICROPHONE ACCESSORIES

- **HM-118TN/TAN** DTMF MICROPHONE  
 DTMF microphone.
- **HM-118N** HAND MICROPHONE  
 Regular hand microphone.
- **HM-133** REMOTE CONTROL MICROPHONE  
 Full remote control microphone with keypad backlighting. Supplied with some versions.
- **OPC-440/OPC-647** MIC EXTENSION CABLES  
 OPC-440: 5.0m (16.4ft); OPC-647: 2.5m (8.2ft)
- **OPC-589** MIC ADAPTER CABLE  
 Allows you to connect an 8-pin microphone.



### ■ OTHER ACCESSORIES

- **CS-2720** CLONING SOFTWARE  
 + **OPC-478** CLONING CABLE  
 For quick and easy programming of memories, etc.
- **OPC-347/OPC-1132** DC POWER CABLES  
 OPC-347: 7.0m (23ft); OPC-1132: 3.0m (9.8ft)
- **OPC-441** SPEAKER EXTENSION CABLE  
 5.0m (16.4ft)
- **OPC-1156** SEPARATION CABLE  
 For operation with the front panel detached. 3.5m (11.5ft). A modular connector is supplied.
- **SP-10** EXTERNAL SPEAKER



Les spécifications et informations données dans ce document peuvent être modifiées sans préavis.

#### ICOM FRANCE

Zac de la Plaine - 1, Rue Brindejonc des Moulinais  
 BP 5804 - 31505 TOULOUSE CEDEX  
 Tél : 05 61 36 03 03 - Fax : 05 61 36 03 00  
 WEB ICOM : <http://www.icom-france.com>  
 E-mail : [icom@icom-france.com](mailto:icom@icom-france.com)



#### Agence Côte d'Azur

Port Inland locaux N°112 et 113  
 701 avenue de Fontmichel - 06210 MANDELIEU  
 Tél : 04 92 19 68 00 - Fax : 04 92 19 68 01

### CACHET REVENDEUR

