NanoVNA-F Quick start guide

By: BH5HNU
Date: 5 Jan 2020
Release: 1.3

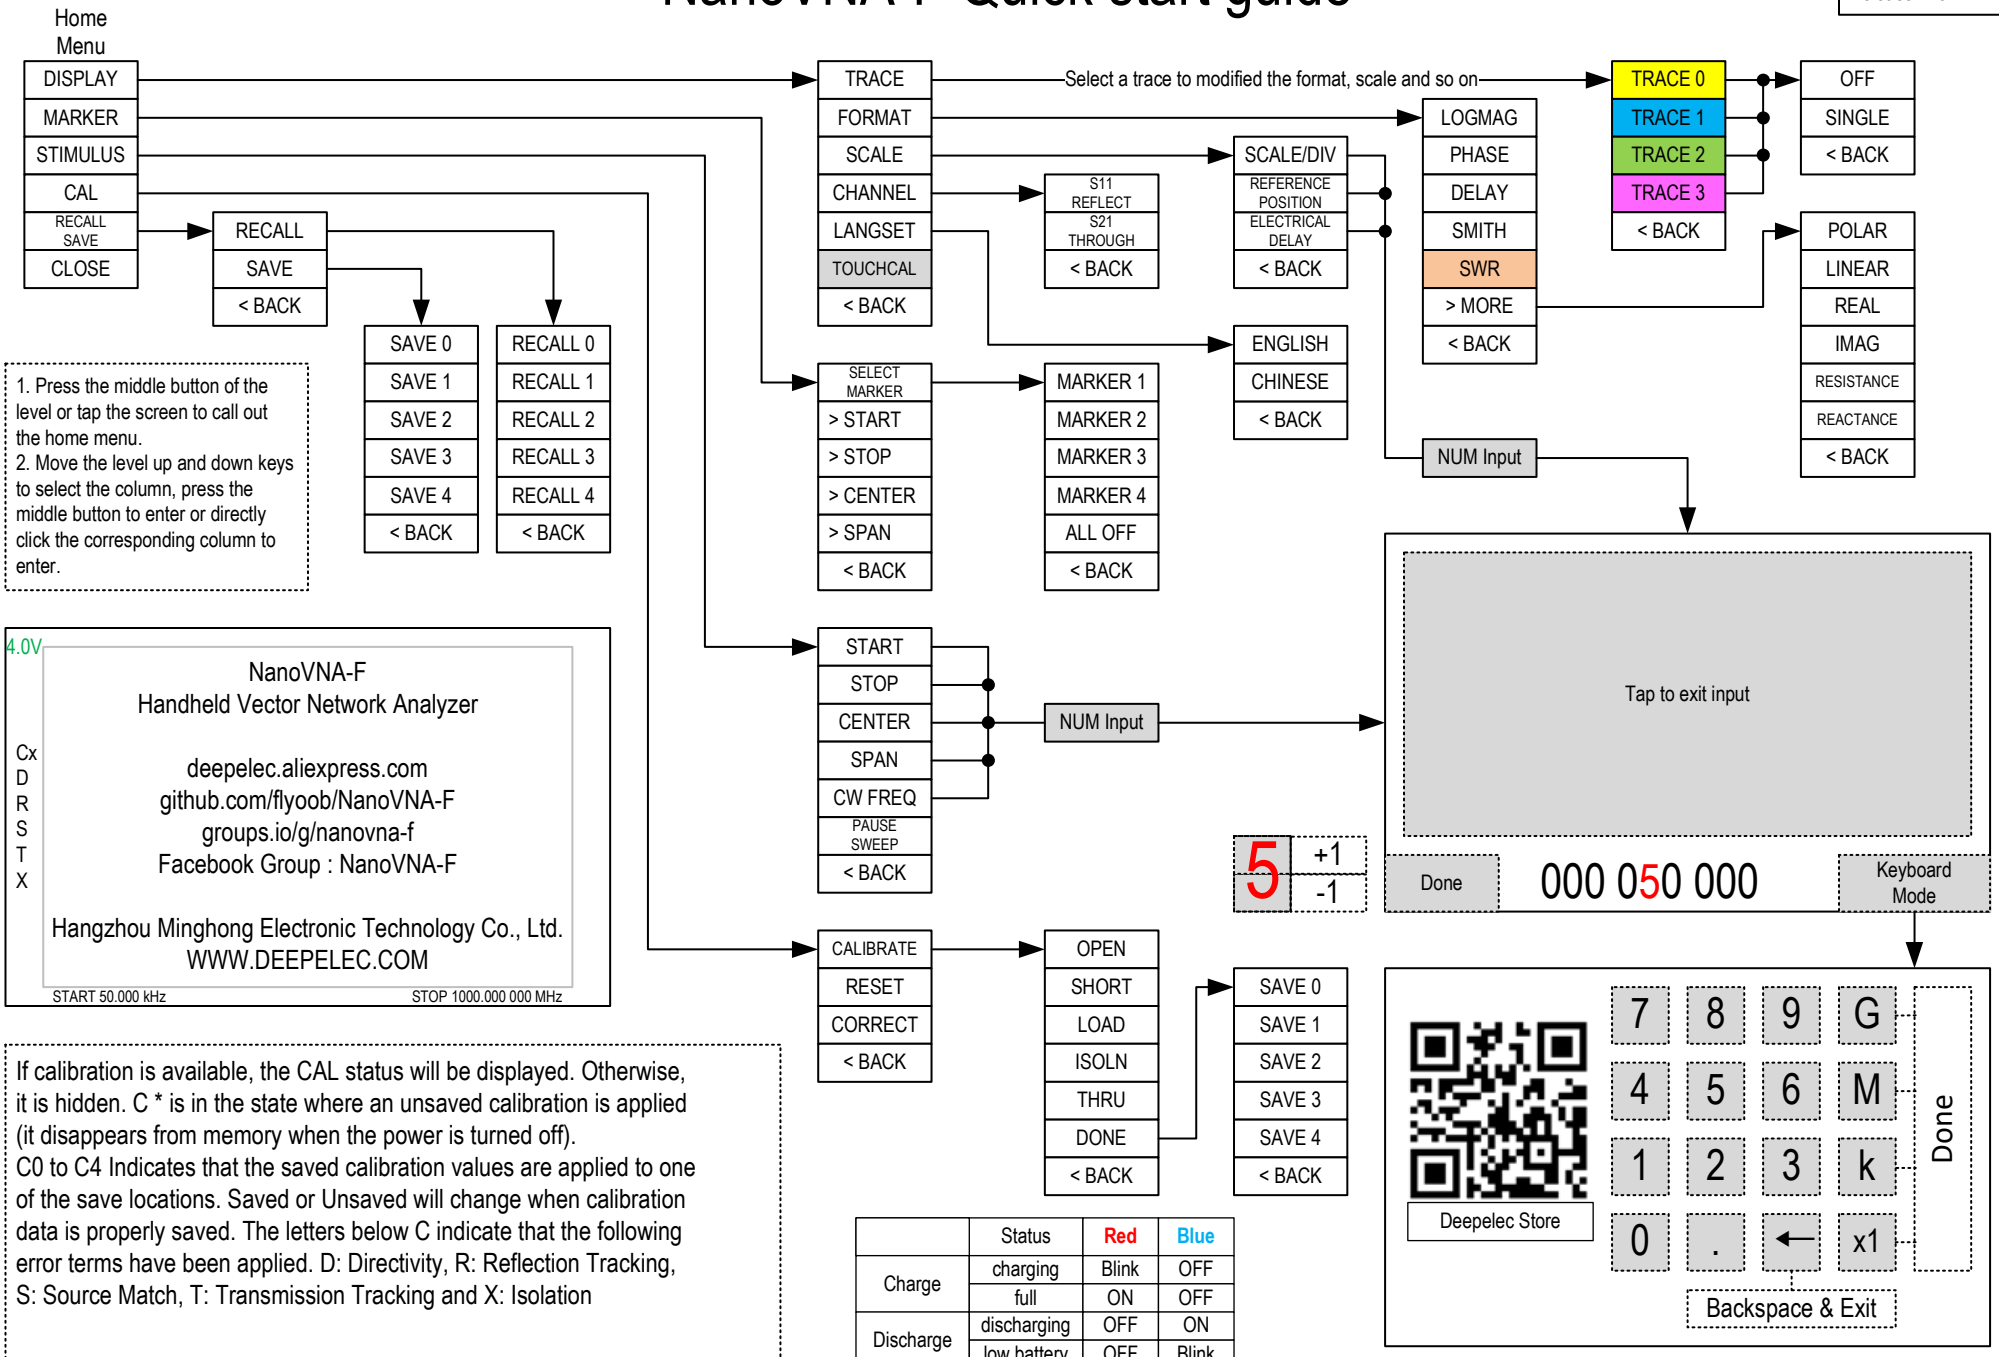

If calibration is available, the CAL status will be displayed. Otherwise, it is hidden. C * is in the state where an unsaved calibration is applied (it disappears from memory when the power is turned off).
C0 to C4 Indicates that the saved calibration values are applied to one of the save locations. Saved or Unsaved will change when calibration data is properly saved. The letters below C indicate that the following error terms have been applied. D: Directivity, R: Reflection Tracking, S: Source Match, T: Transmission Tracking and X: Isolation

	Status	Red	Blue
Charge	charging	Blink	OFF
	full	ON	OFF
Discharge	discharging	OFF	ON
	low battery	OFF	Blink