



TURBO-5000

PERFORMER-5000

FEATURES

- # CB & 10 m Mobile antennas
- # Very High power handling capability
- # Tunable from 27 to 28.5 MHz
- # Protection from static discharges DC-Ground
- # 17/7 PH tapered stainless steel whip
- # Whip detachable for car-wash
- # Suitable for magnetic mount installation

TECHNICAL DATA

Type: base loaded
 Impedance: 50 Ω unbalanced
 Frequency range: 27-28.5 MHz
 Polarization: vertical
 S.W.R. at res. freq.: ≤ 1.2:1
 Max. power: 1500 Watts (CW) continuous
 5000 Watts (CW) short time
 Bandwidth at S.W.R. 2:1: 2300 kHz
 Mounting:
 TURBO-5000, PERFORMER-5000 hole Ø 12.5 mm
 TURBO-5000 PL, PERFORMER-5000 PL UHF-male (PL 259)
 Cable length / Type: PL version not supplied
 Standard: for power up to 600 Watts max 4m / RG 58
 Hi power: for power up to 2000 Watts max ... 4m / RG 303 teflon
 Height (approx.): 1965 mm
 Weight (approx.): 650 gr


P/N 2218505.50	PERFORMER-5000
P/N 2218505.50/PW	PERFORMER-5000 hi power cable
P/N 2218505.51	PERFORMER-5000 PL
P/N 2202205.50	TURBO-5000
P/N 2202205.50/PW	TURBO-5000 hi power cable
P/N 2202205.43	TURBO-5000 PL




AVAILABLE MAGNETIC MOUNT TYPES
 (for power up to 600 Watts max.)
 MAG 145 PL 2502702.05
 MAG 160 PL 2502802.05

NEW PRODUCTS

COIL SECTION VIEW

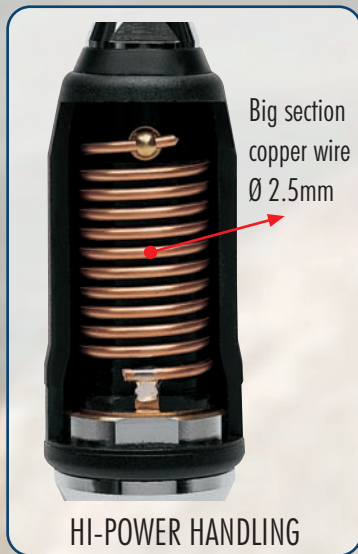

INSTALLATION ALTERNATIVES

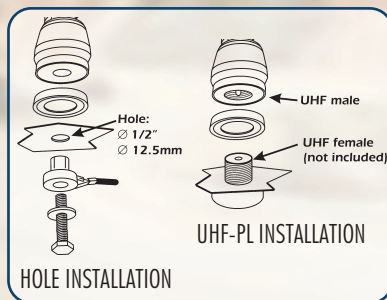

TURBO-5000

INCLINATION SYSTEM
 for 90° Tilting
 NO Tools required

LOCKING HANDLE
 STRONG DIE-CAST JOINT
 for 180° Tilting



PERFORMER-5000